




Operator  
Telephone  
Fax  
e-Mail

## Кота +6,20-Отдел Изкуство / Single Sheet Output

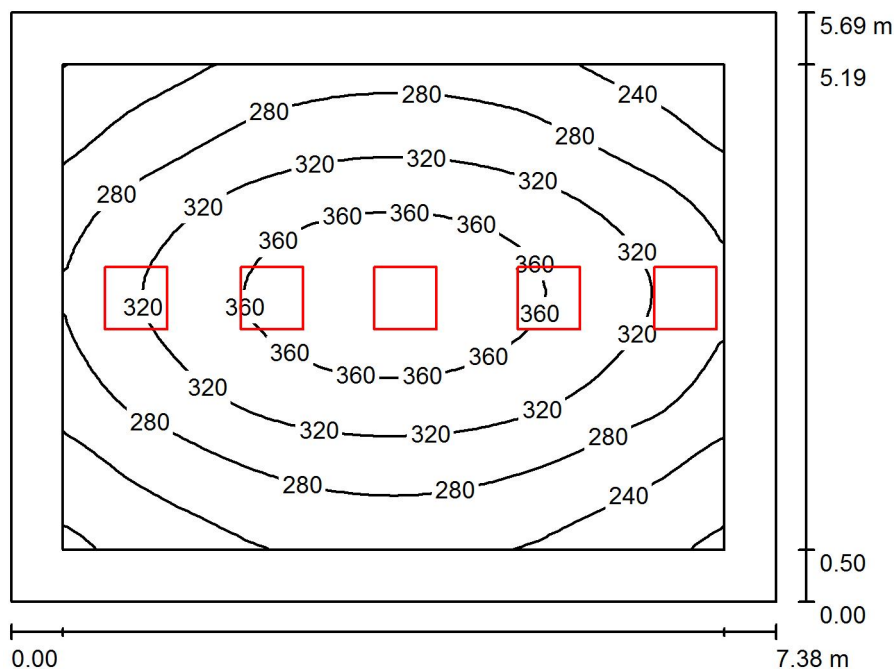

Height of Room: 4.850 m, Mounting Height: 4.850 m, Maintenance factor: 0.80

Values in Lux, Scale 1:73

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Workplane	/	299	193	385	0.647
Floor	20	239	154	316	0.644
Ceiling	70	70	45	118	0.640
Walls (4)	50	159	54	542	/

### Workplane:

Height: 0.750 m  
Grid: 32 x 32 Points  
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.547, Ceiling / Working Plane: 0.235.

### Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	5	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
Total:			23861	24000	200.0

Specific connected load:  $4.77 \text{ W/m}^2 = 1.59 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $41.96 \text{ m}^2$ )