




Operator  
Telephone  
Fax  
e-Mail

## Кота +6,20-Книгохранилище / Single Sheet Output

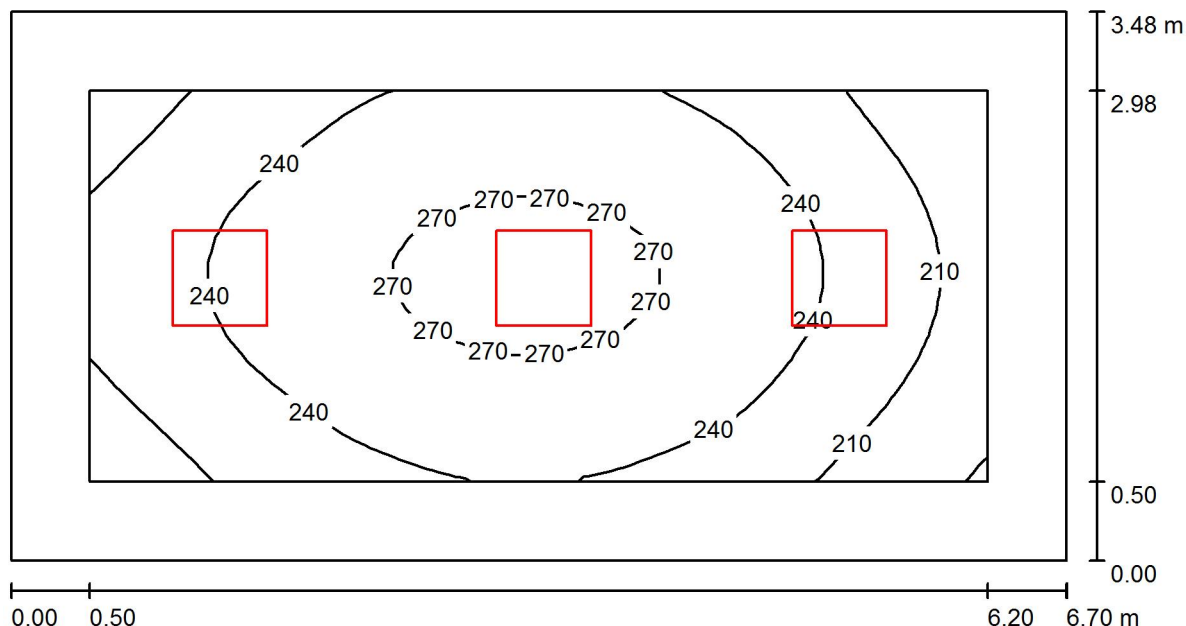

Height of Room: 4.850 m, Mounting Height: 4.850 m, Maintenance factor: 0.80

Values in Lux, Scale 1:48

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u0$
Workplane	/	240	178	279	0.743
Floor	20	185	128	226	0.692
Ceiling	70	71	45	82	0.629
Walls (4)	50	151	56	313	/

### Workplane:

Height: 0.750 m  
Grid: 32 x 16 Points  
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.667, Ceiling / Working Plane: 0.297.

### Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	3	OCTA-LIGHT PLC OCTL_OLOT_S-40RNR-230 (1.000)	4772	4800	40.0
Total:			14317	14400	120.0

Specific connected load:  $5.15 \text{ W/m}^2 = 2.15 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $23.32 \text{ m}^2$ )