




Operator
Telephone
Fax
e-Mail

Кота +1,20-допълнително осветление скрито Заседателна зала / Single Sheet Output

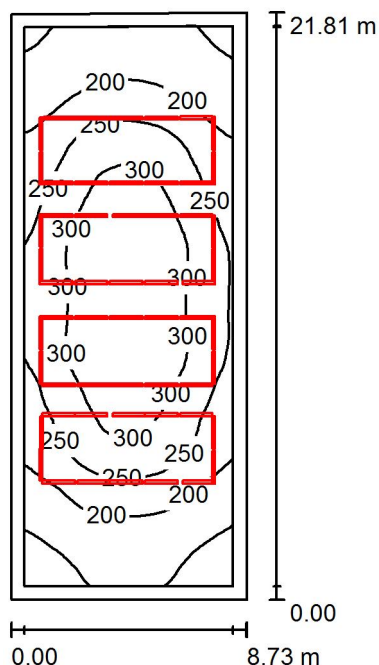

Height of Room: 4.700 m, Maintenance factor: 0.80

Values in Lux, Scale 1:281

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	245	130	350	0.532
Floor	20	211	114	301	0.544
Ceiling	70	83	64	151	0.771
Walls (4)	50	233	107	564	/

Workplane:

Height: 0.750 m
Grid: 32 x 64 Points
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 1.000, Ceiling / Working Plane: 0.340.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	56	Octa Light OCTL_SLS_120_40_M_CW_230 (1.000)	3144	3144	40.0
Total:			176058	176053	2240.0

Specific connected load: $11.78 \text{ W/m}^2 = 4.82 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 190.14 m^2)