




Operator
Telephone
Fax
e-Mail

Кота +11,30-стая 27 / Single Sheet Output

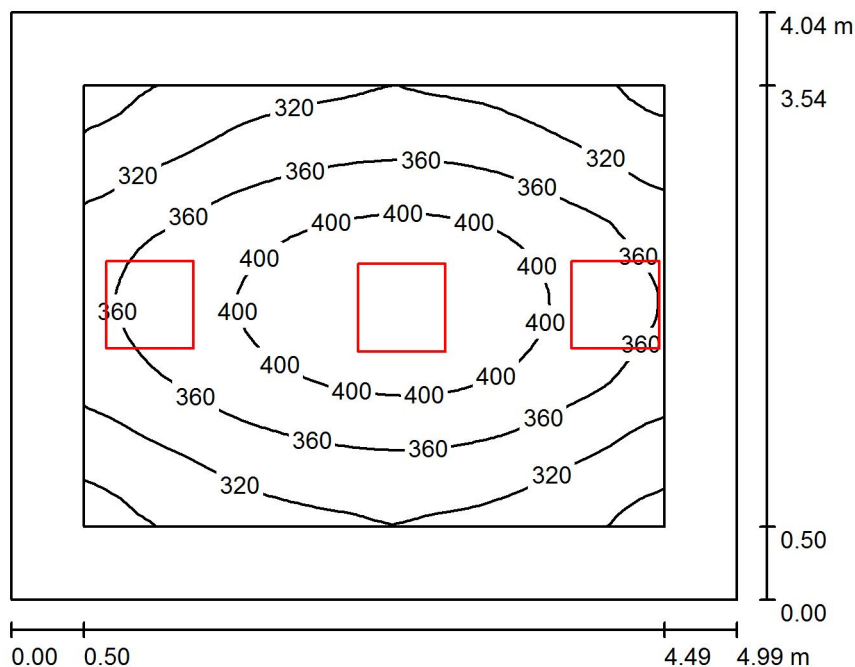

Height of Room: 3.850 m, Mounting Height: 3.850 m, Maintenance factor: 0.80

Values in Lux, Scale 1:52

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	356	265	432	0.743
Floor	20	263	179	331	0.682
Ceiling	70	86	55	120	0.637
Walls (4)	50	191	66	586	/

Workplane:

Height: 0.750 m
Grid: 32 x 32 Points
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.569, Ceiling / Working Plane: 0.242.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	3	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
Total:			14317	14400	120.0

Specific connected load: $5.96 \text{ W/m}^2 = 1.67 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 20.13 m^2)