




Operator
Telephone
Fax
e-Mail

Кота +11,30-стая 18, стая 19, стая 28, стая 29 / Single Sheet Output

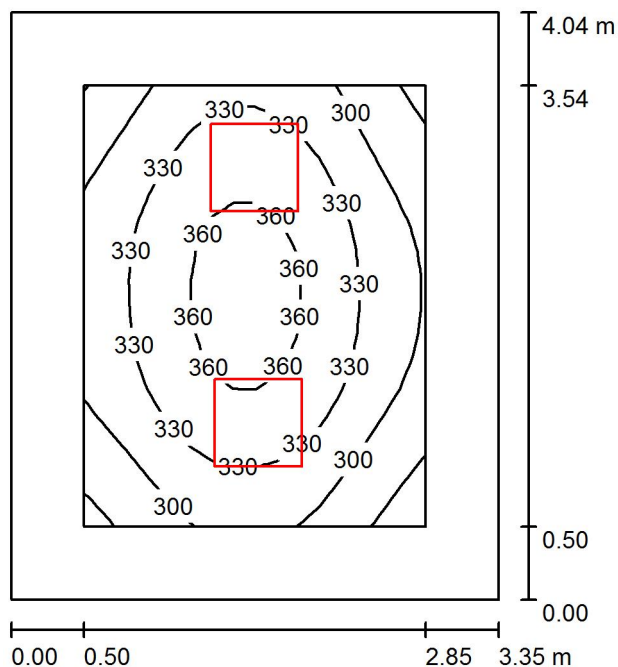

Height of Room: 3.850 m, Mounting Height: 3.850 m, Maintenance factor: 0.85

Values in Lux, Scale 1:52

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	325	252	372	0.776
Floor	20	230	165	280	0.717
Ceiling	70	86	58	109	0.671
Walls (4)	50	184	65	473	/

Workplane:

Height: 0.750 m
Grid: 16 x 16 Points
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.611, Ceiling / Working Plane: 0.264.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	2	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
Total:			9544	9600	80.0

Specific connected load: $5.92 \text{ W/m}^2 = 1.82 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 13.52 m^2)