




Operator  
Telephone  
Fax  
e-Mail

## Кота +6,20-Галерия-допълнително скрито осветление / Single Sheet Output

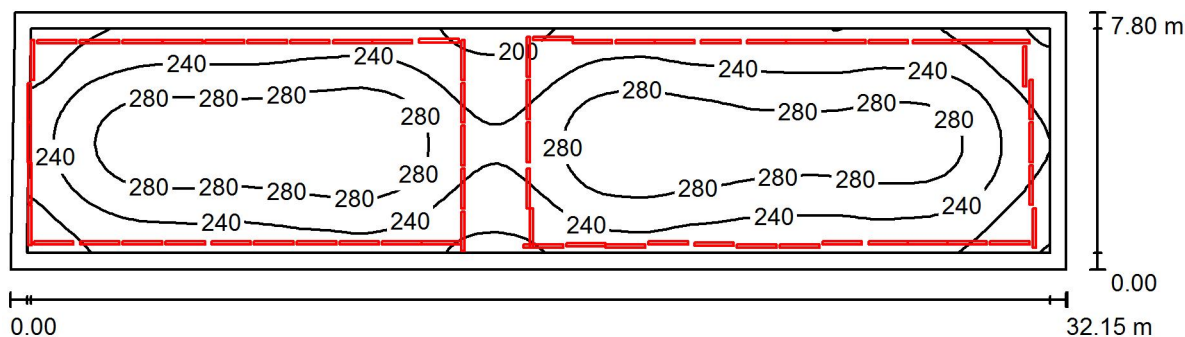

Height of Room: 4.850 m, Maintenance factor: 0.95

Values in Lux, Scale 1:230

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u0$
Workplane	/	250	155	316	0.618
Floor	20	217	123	280	0.565
Ceiling	70	85	68	202	0.805
Walls (4)	50	236	119	660	/

### Workplane:

Height: 0.750 m  
Grid: 128 x 32 Points  
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.999, Ceiling / Working Plane: 0.339.

### Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	64	Octa Light OCTL_SLS_120_40_M_CW_230 (1.000)	3144	3144	40.0
Total:			201209	201203	2560.0

Specific connected load:  $10.23 \text{ W/m}^2 = 4.09 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $250.18 \text{ m}^2$ )