




Operator
Telephone
Fax
e-Mail

Кота +11,30-стая 8-ОШИ солфезж / Single Sheet Output

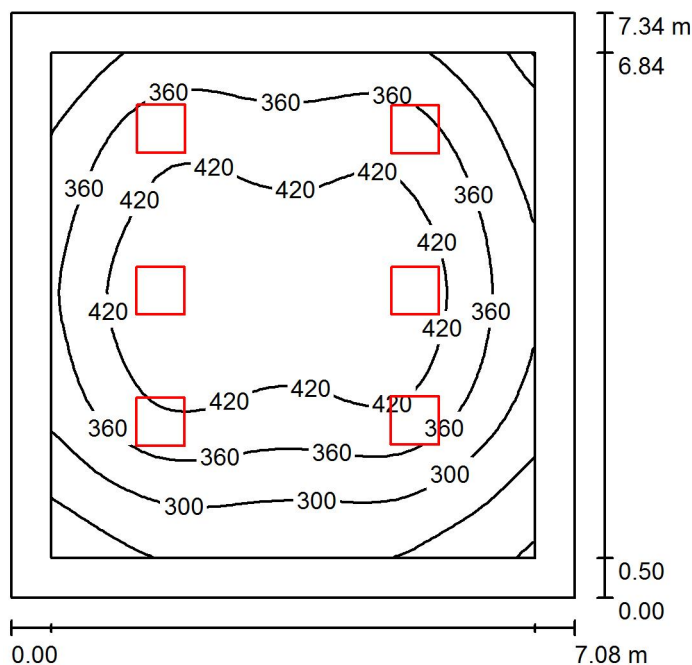

Height of Room: 3.850 m, Mounting Height: 3.850 m, Maintenance factor: 0.80

Values in Lux, Scale 1:95

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	367	175	474	0.477
Floor	20	294	148	400	0.504
Ceiling	70	73	46	91	0.622
Walls (4)	50	170	56	300	/

Workplane:

Height: 0.750 m
Grid: 32 x 32 Points
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.466, Ceiling / Working Plane: 0.200.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	6	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
Total:			28633	28800	240.0

Specific connected load: $4.62 \text{ W/m}^2 = 1.26 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 51.98 m^2)