




Operator  
Telephone  
Fax  
e-Mail

## Кота +6,20-Директор / Single Sheet Output

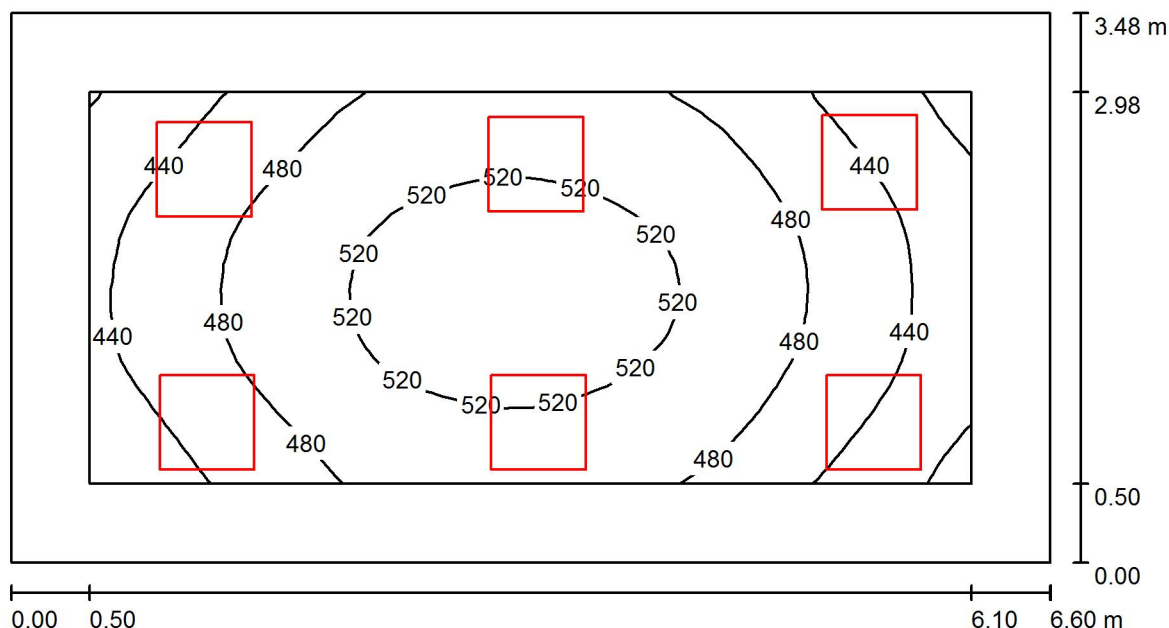

Height of Room: 4.850 m, Mounting Height: 4.850 m, Maintenance factor:  
0.85

Values in Lux, Scale 1:48

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u0$
Workplane	/	482	387	538	0.803
Floor	20	379	280	447	0.740
Ceiling	70	164	130	222	0.793
Walls (4)	50	330	152	747	/

**Workplane:**

Height: 0.750 m  
Grid: 32 x 16 Points  
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.733, Ceiling / Working Plane: 0.341.

**Luminaire Parts List**

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	6	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
Total:			28633	28800	240.0

Specific connected load:  $10.45 \text{ W/m}^2 = 2.17 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $22.97 \text{ m}^2$ )