




Operator
Telephone
Fax
e-Mail

Кота -2,70-Коридор / Single Sheet Output

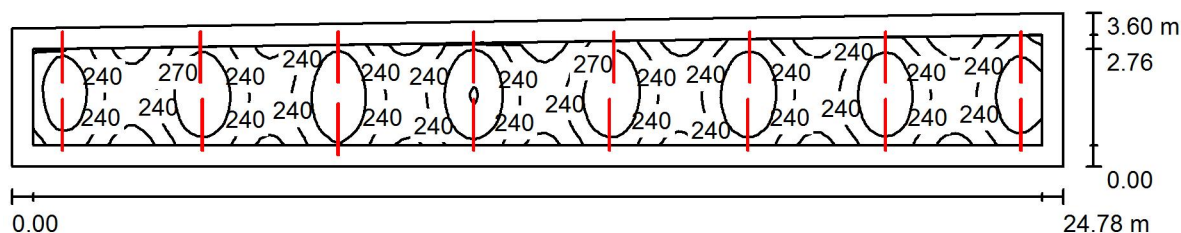

Height of Room: 2.700 m, Mounting Height: 2.700 m, Maintenance factor:
0.80

Values in Lux, Scale 1:178

| Surface | ρ [%] | E_{av} [lx] | E_{min} [lx] | E_{max} [lx] | u_0 |
|-----------|------------|---------------|----------------|----------------|-------|
| Workplane | / | 249 | 189 | 304 | 0.759 |
| Floor | 20 | 202 | 143 | 233 | 0.706 |
| Ceiling | 70 | 66 | 53 | 259 | 0.800 |
| Walls (4) | 50 | 165 | 93 | 1070 | / |

Workplane:

Height: 0.750 m
Grid: 128 x 32 Points
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.725, Ceiling / Working Plane: 0.266.

Luminaire Parts List

| No. | Pieces | Designation (Correction Factor) | Φ (Luminaire) [lm] | Φ (Lamps) [lm] | P [W] |
|--------|--------|---|-------------------------|---------------------|-------|
| 1 | 16 | S0-106_WO-1197_Mobi OCTL_SLS_120_20_M_CW_230 (1.000) | 2377 | 2377 | 20.0 |
| Total: | | | 38039 | 38035 | 320.0 |

Specific connected load: $3.77 \text{ W/m}^2 = 1.51 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 84.87 m^2)