


Operator
Telephone
Fax
e-Mail

Кота +11,30-стая 3-Директор / Single Sheet Output

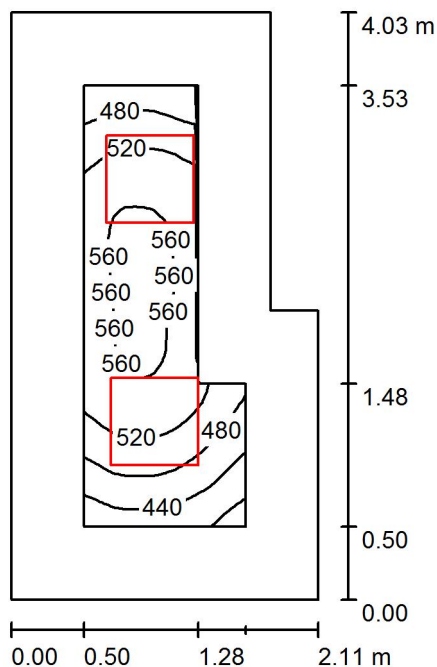

Height of Room: 3.850 m, Mounting Height: 3.000 m, Maintenance factor: 0.80

Values in Lux, Scale 1:52

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	$u0$
Workplane	/	514	381	569	0.740
Floor	20	328	222	399	0.676
Ceiling	70	87	61	106	0.703
Walls (6)	50	226	58	634	/

Workplane:

Height:	0.750 m
Grid:	16 x 32 Points
Boundary Zone:	0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.460, Ceiling / Working Plane: 0.168.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	2	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
			Total: 9544	Total: 9600	80.0

Specific connected load: $10.19 \text{ W/m}^2 = 1.98 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 7.85 m^2)