




Operator  
Telephone  
Fax  
e-Mail

## Кота +6,20-Библиотека и читалня / Single Sheet Output

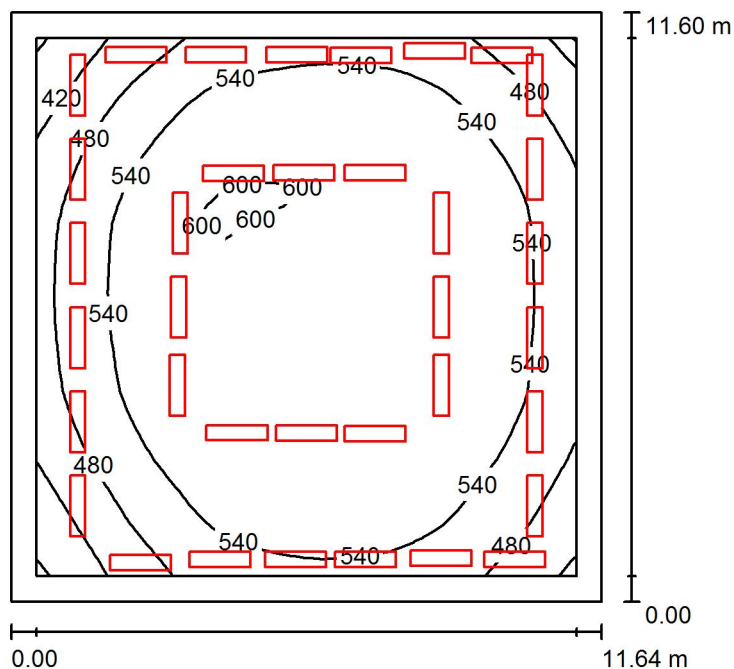

Height of Room: 4.850 m, Mounting Height: 4.850 m, Maintenance factor: 0.80

Values in Lux, Scale 1:149

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Workplane	/	541	355	607	0.656
Floor	20	481	294	563	0.612
Ceiling	70	136	101	226	0.743
Walls (4)	50	335	128	673	/

### Workplane:

Height: 0.750 m  
Grid: 32 x 32 Points  
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.640, Ceiling / Working Plane: 0.252.

### Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	36	OCTA-LIGHT PLC OCTL_PNL_12030-36NW-7-230-20 (1.000)	3397	3400	36.0
Total:			122303	122400	1296.0

Specific connected load:  $9.60 \text{ W/m}^2 = 1.77 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $135.02 \text{ m}^2$ )