




Operator  
Telephone  
Fax  
e-Mail

## Кота +11,30-стая 2-Директор / Single Sheet Output

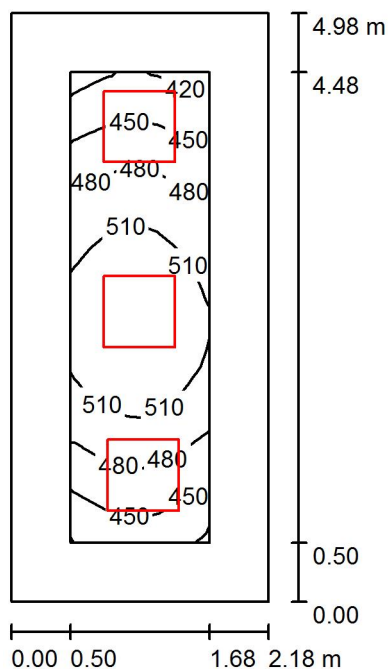

Height of Room: 3.850 m, Mounting Height: 3.850 m, Maintenance factor: 0.90

Values in Lux, Scale 1:64

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Workplane	/	486	406	540	0.836
Floor	20	343	256	407	0.747
Ceiling	70	161	111	204	0.688
Walls (4)	50	315	135	630	/

**Workplane:**

Height: 0.750 m  
Grid: 8 x 16 Points  
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.715, Ceiling / Working Plane: 0.332.

**Luminaire Parts List**

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	3	OCTA-LIGHT PLC OCTL_OLOT_S-40R-CW-230 (1.000)	4532	5000	40.0
Total:			13596	15000	120.0

Specific connected load:  $11.05 \text{ W/m}^2 = 2.27 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $10.86 \text{ m}^2$ )