


**Кота +11,30-стая7, стая 12 / Single Sheet Output**

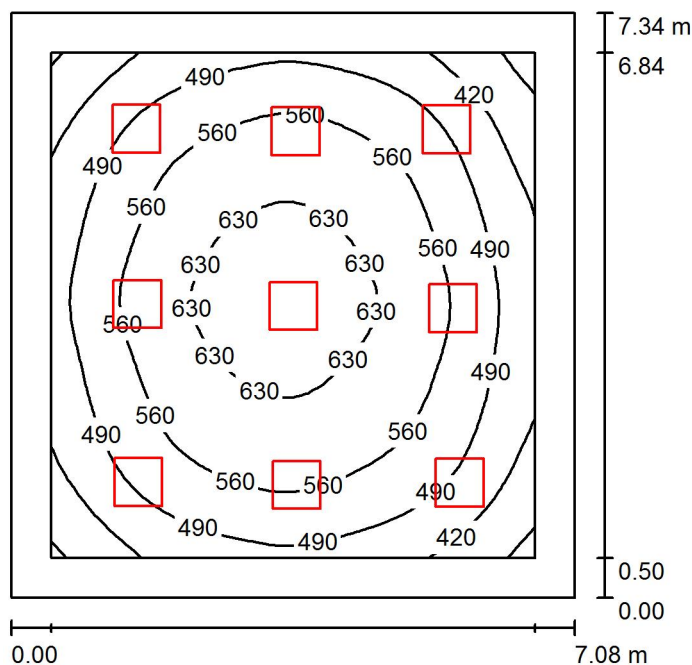

Height of Room: 3.850 m, Mounting Height: 3.850 m, Maintenance factor: 0.80

Values in Lux, Scale 1:95

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u0$
Workplane	/	532	326	669	0.612
Floor	20	432	255	571	0.591
Ceiling	70	113	74	128	0.659
Walls (4)	50	261	96	397	/

**Workplane:**

Height:	0.750 m
Grid:	32 x 32 Points
Boundary Zone:	0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.501, Ceiling / Working Plane: 0.212.

## Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	9	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
			Total: 42950	Total: 43200	360.0

Specific connected load:  $6.93 \text{ W/m}^2 = 1.30 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $51.98 \text{ m}^2$ )