




Operator  
Telephone  
Fax  
e-Mail

## Кота +11,30-стая 4-Счетоводство / Single Sheet Output

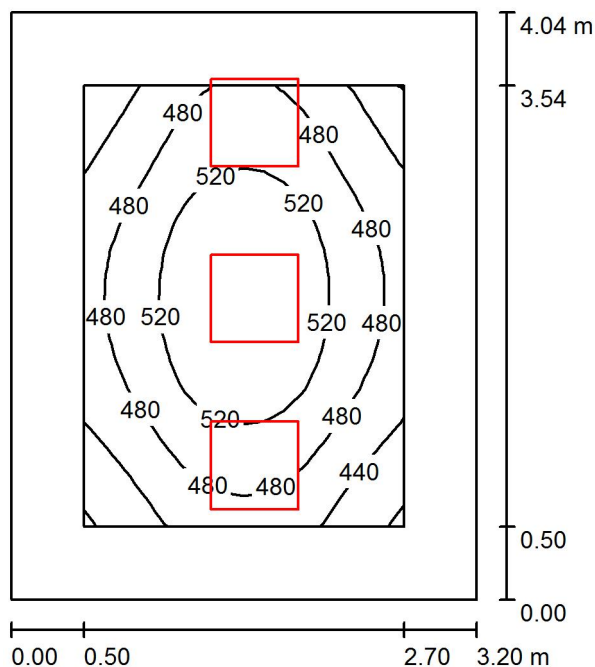

Height of Room: 3.850 m, Mounting Height: 3.850 m, Maintenance factor: 0.85

Values in Lux, Scale 1:52

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Workplane	/	491	396	559	0.807
Floor	20	348	256	420	0.735
Ceiling	70	136	90	194	0.658
Walls (4)	50	287	104	922	/

### Workplane:

Height: 0.750 m  
Grid: 16 x 16 Points  
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.632, Ceiling / Working Plane: 0.278.

### Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	3	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
Total:			14317	14400	120.0

Specific connected load:  $9.29 \text{ W/m}^2 = 1.89 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $12.91 \text{ m}^2$ )