


Operator
Telephone
Fax
e-Mail

Кота -2,70-помещение 34-Галерия / Single Sheet Output

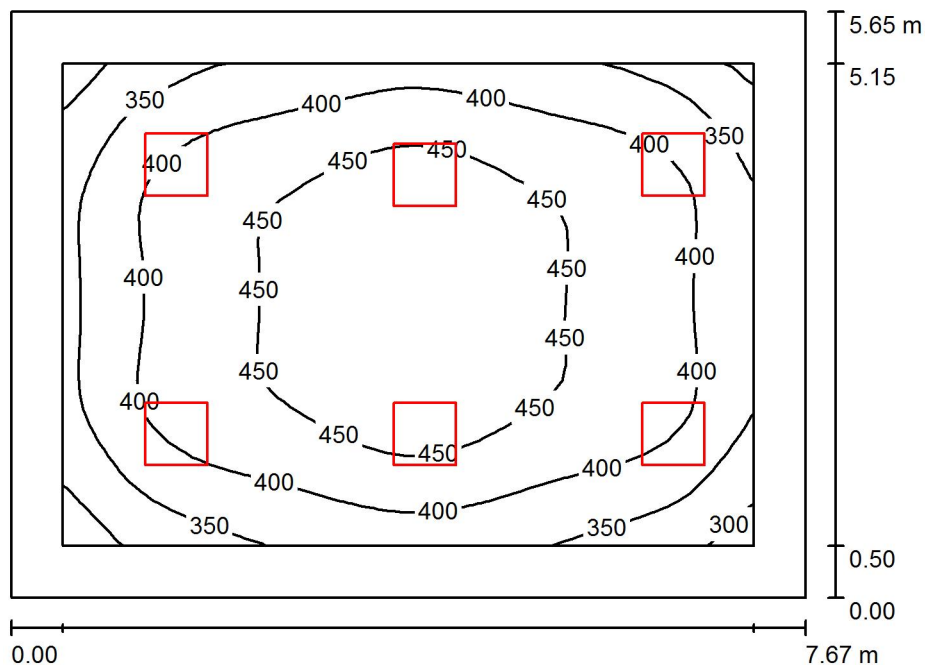

Height of Room: 3.700 m, Mounting Height: 3.700 m, Maintenance factor: 0.80

Values in Lux, Scale 1:73

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	411	269	487	0.654
Floor	20	329	206	416	0.626
Ceiling	70	88	62	99	0.698
Walls (4)	50	208	73	321	/

Workplane:

Height: 0.750 m
Grid: 32 x 32 Points
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.526, Ceiling / Working Plane: 0.215.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	6	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
Total:			28633	28800	240.0

Specific connected load: $5.54 \text{ W/m}^2 = 1.35 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 43.35 m^2)