




Operator  
Telephone  
Fax  
e-Mail

## кота +11,30-стая 6-ДК директор / Single Sheet Output

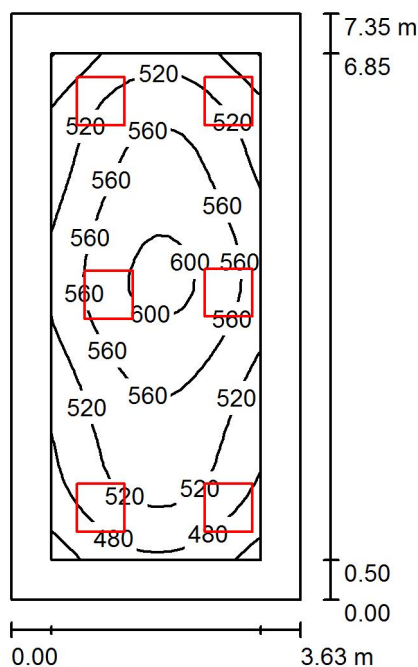

Height of Room: 3.850 m, Mounting Height: 3.850 m, Maintenance factor: 0.82

Values in Lux, Scale 1:95

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Workplane	/	536	421	612	0.786
Floor	20	418	286	506	0.683
Ceiling	70	141	113	188	0.802
Walls (4)	50	314	127	587	/

### Workplane:

Height: 0.750 m  
Grid: 16 x 32 Points  
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.626, Ceiling / Working Plane: 0.263.

### Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	6	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
Total:			28633	28800	240.0

Specific connected load:  $8.99 \text{ W/m}^2 = 1.68 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $26.70 \text{ m}^2$ )