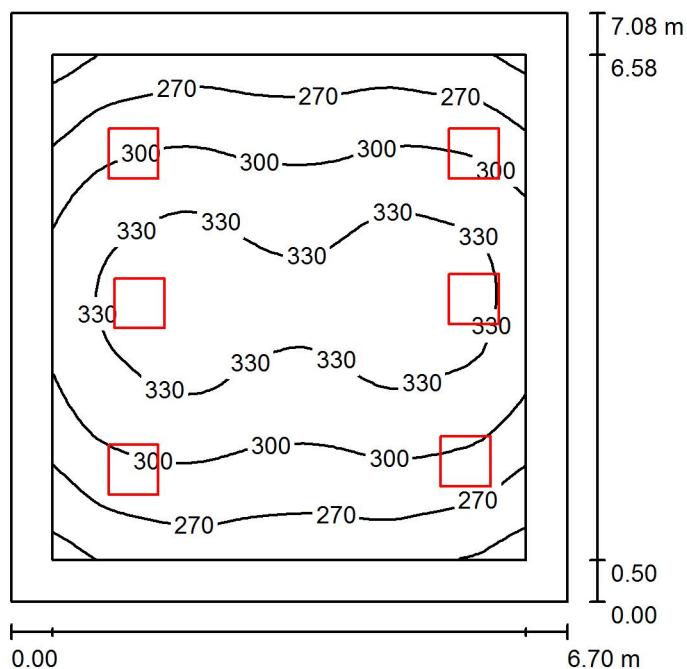


Operator  
Telephone  
Fax  
e-Mail

**Кота +6,20-Детски отдел / Single Sheet Output**

Height of Room: 4.850 m, Mounting Height: 4.850 m, Maintenance factor: 0.80

Values in Lux, Scale 1:91

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Workplane	/	302	226	346	0.748
Floor	20	251	175	301	0.698
Ceiling	70	80	55	96	0.689
Walls (4)	50	182	70	397	/

**Workplane:**

Height:	0.750 m
Grid:	32 x 32 Points
Boundary Zone:	0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.627, Ceiling / Working Plane: 0.264.

## Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	6	OCTA-LIGHT PLC OCTL_OLOT_S-40RNWR-230 (1.000)	4772	4800	40.0
			Total: 28633	Total: 28800	240.0

Specific connected load:  $5.06 \text{ W/m}^2 = 1.68 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $47.41 \text{ m}^2$ )